


Instructions

Instructions haid-tec TurfPlusPad

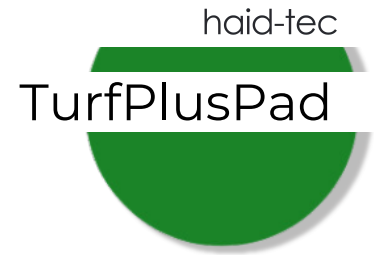

The following must be taken into account when using the TurfPlusPad:

- Do not use haid-tec TurfPlusPad dry!
- The green side of the TurfPlusPad points towards the flooring.
- For all orbital/eccentric machines with up to 3,000 oscillations per minute.
- **DO NOT use on sensitive surfaces (e.g. high-gloss plastics, painted surfaces, etc.).**
- If necessary, test in an inconspicuous area before use (observe the floor manufacturer's instructions).

Install the haid-tec TurfPlusPad on orbital/eccentric machines:

- The green side of the TurfPlusPad points towards the floor covering, the white Velcro side is attached to the machine.
- The haid-tec TurfPlusPad can be used on all common orbital/eccentric machines
- Moisten the lawn pad before use or increase the amount of water at the beginning.

Use with cleaning products

Due to the excellent mechanical cleaning properties, the amount of cleaning agents used can be reduced if necessary. The pads can be used with all common cleaning agents. Follow the manufacturer's instructions for use and dosage.

Service life and replacement of the haid-tec TurfPlusPad

Thanks to the very robust fibers and the high-quality workmanship, the TurfPlusPad have a very long service life. Dirt can be easily rinsed out with water between uses. The pads wear out when cleaning. If the green lawn fibers are largely worn out, the pads need to be replaced. The service life of the haid-tec TurfPlusPad depends on the surface quality of the floor covering, the quality of the installation and the type of cleaning machine used.

haid-tec
geprüfte Oberflächentechnik GmbH
Riedstraße 10
D-89616 Rottenacker
T: +49 7393 / 918 39 10
F: +49 7393 / 918 39 19
E: info@haid-tec.de
www.haid-tec.com
shop.haid-tec.com/